


DIN 844 BLMW

Frezy trzpieniowe walcowo-czołowe z ostrzami centralnymi, 3-ostrzowe, z chwytem walcowym z płaską, długie

End mills centre cutting, 3-flute, with flatted shank, long series

Schaftfräser, Zentrumschnitt, Zylinderschaft mit Mitnahmevläche, 3-Schneiden, lang

Фрезы концевые с центральным зубом, 3-х перьевые, хвостовик с лыской, удлинённые

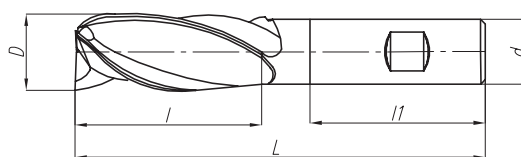

DIN 844 BLMW	Z=3			DIN 1835 B	$\lambda=40^\circ$ $\gamma=23^\circ$	6.1+6.4 7.1+7.4 8.1+8.3
--------------	-----	--	--	------------	---	-------------------------------

D (k10)	d (h6)	L	l	l1	z	HSS-E	
						Code No	0641-551-
5	6	68	24	36	3	835100	●
5.5	6	68	24	36	3	835113	○
6	6	68	24	36	3	835201	●
6.5	10	80	30	40	3	835214	○
7	10	80	30	40	3	835303	○
7.5	10	80	30	40	3	835316	○
8	10	88	38	40	3	835405	●
8.5	10	88	38	40	3	835418	○
9	10	88	38	40	3	835507	○
9.5	10	88	38	40	3	835510	○
10	10	95	45	40	3	835609	●
11	12	102	45	45	3	835700	○
12	12	110	53	45	3	835802	●
13	12	110	53	45	3	835904	○
14	12	110	53	45	3	836009	○
15	12	110	53	45	3	836100	○
16	16	123	63	48	3	836200	●
17	16	123	63	48	3	836304	○
18	16	123	63	48	3	836406	○
19	16	123	63	48	3	836508	○
20	20	141	75	50	3	836600	●
21	20	141	75	50	3	836701	○
22	20	141	75	50	3	836803	○
23	20	141	75	50	3	836905	○
24	25	166	90	56	3	837000	○
25	25	166	90	56	3	837101	○
26	25	166	90	56	3	837203	○
28	25	166	90	56	3	837305	○
30	25	166	90	56	3	837407	○
32	32	186	106	60	3	837509	○
35	32	186	106	60	3	837600	○
36	32	186	106	60	3	837702	○
40	40	217	125	70	3	837804	○
44	40	217	125	70	3	837906	○
45	40	217	125	70	3	838000	○
50	50	252	150	80	3	838102	○
56	50	252	150	80	3	838204	○
63	50	282	180	80	3	838306	○