


# DIN 327 DK

Frezy trzpieniowe, 2-ostrowe, z chwytem wlacowym z płaską, do rowków na wpusty

Slot drills, 2-flute, with flattened shank

Langlochfräser, 2-Schneiden, Zylinderschaft mit Mitnahmevläche

Фрезы концевые шпоночные, 2-х перьевые, хвостовик с лыской

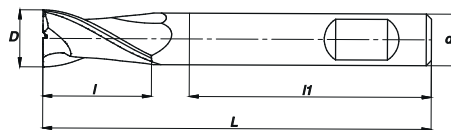

DIN 327 DK	Z=2			$\lambda=30^\circ$ $\gamma=10^\circ$	
---------------	-----	--	--	---	--

D (e8)	d (h6)	L	l	l1	z	HSS-E	
						Code No 0641-554-	
2	6	48	4	36	2	145104	●
2.5	6	49	5	36	2	145206	●
3	6	49	5	36	2	145308	●
4	6	51	7	36	2	145501	●
5	6	52	8	36	2	145705	●
6	6	52	8	36	2	145909	●
7	10	60	10	40	2	146105	●
8	10	61	11	40	2	146309	●
10	10	63	13	40	2	146706	●
12	12	73	16	45	2	147106	●
14	12	73	16	45	2	147300	●
16	16	79	19	48	2	147503	●
18	16	79	19	48	2	147605	●
20	20	88	22	50	2	147707	●
22	20	88	22	50	2	147809	○
24	25	102	26	56	2	148005	○
25	25	102	26	56	2	148107	○
28	25	102	26	56	2	148300	○
32	32	112	32	60	2	148504	○
36	32	112	32	60	2	148606	○
40	40	130	38	70	2	148708	○
45	40	130	38	70	2	148800	○
50	50	147	45	80	2	148901	○
56	50	147	45	80	2	149006	○
63	50	155	53	80	2	149108	○