


# DIN 327 DKR

Frezy trzpieniowe z czołem kulistym, 2-ostrzowe, z chwytem walcowym z płaską

Slot drills ball nosed, 2-flute, flatted shank

Vollradius Langlochfräser, 2-Schneiden, Zylinderschaft mit Mitnahmefläsche

Фрезы концевые со сферическим торцом с лыской, 2-х перьевые

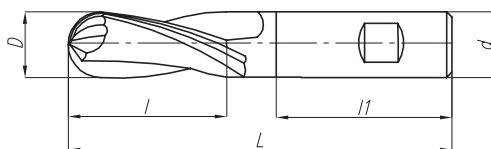

<b>DIN 327 DKR</b>	<b>Z=2</b>		<b>DIN 1835 B</b>	$\lambda=30^\circ$ $\gamma=10^\circ$	
------------------------	------------	--	-----------------------	---	--

D (h10)	d (h6)	L	l	l1	z	HSS-E	
						Code No 0641-559-	
2	6	48	4	36	2	470109	●
2.5	6	49	5	36	2	470200	○
3	6	49	5	36	2	470302	●
3.5	6	50	6	36	2	470315	○
4	6	51	7	36	2	470404	●
4.5	6	51	7	36	2	470506	○
5	6	52	8	36	2	470608	●
6	6	52	8	36	2	470700	●
6.5	10	60	10	40	2	470801	○
7	10	60	10	40	2	470903	○
8	10	61	11	40	2	471008	●
9	10	61	11	40	2	471100	○
10	10	63	13	40	2	471201	●
11	12	70	13	45	2	471303	○
12	12	73	16	45	2	471405	●
13	12	73	16	45	2	471507	○
14	12	73	16	45	2	471609	○
16	16	79	19	48	2	471700	●
18	16	79	19	48	2	471802	○
20	20	88	22	50	2	471904	●
22	20	88	22	50	2	472009	○
23	20	88	22	50	2	472100	○
24	25	102	26	56	2	472202	○
25	25	102	26	56	2	472304	○
28	25	102	26	56	2	472406	○
32	32	112	32	60	2	472508	○
36	32	112	32	60	2	472600	○
40	40	130	38	70	2	472701	○
45	40	130	38	70	2	472803	○
50	50	147	45	80	2	472905	○
56	50	147	45	80	2	473000	○
63	50	155	53	80	2	473101	○