

DIN 6518 A/B


H

Frezy ćwierćokrągłe wklęsłe

Corner rounding cutters

Viertelrund Profilfräser, konkav

Фрезы радиусные вогнутые

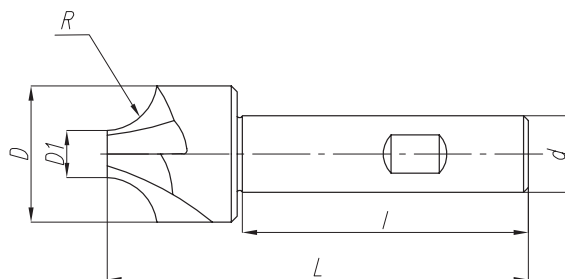

DIN
6518
A/B



Form A – chwyt walcowy / plain shank / Zylinderschaft / плоский хвостовик

R (H11)	D	D1 (js14)	d (h8)	L (js18)	l	z	HSS	
							Code No 0641-594-	
1	8	6	10	60	40	4	200104	●
1.25	8.5	6	10	60	40	4	200206	●
1.6	9.2	6	10	60	40	4	200308	●
2	10	6	10	60	40	4	200400	●
2.5	11	6	10	60	40	4	200501	●
3	12	6	12	60	45	4	200603	●
3.15	12.3	6	12	60	45	4	200705	●
4	14	6	12	60	45	4	200807	●
5	16	6	12	60	45	4	200909	●
6	20	8	16	67	48	4	201003	●
6.3	20.6	8	16	71	48	4	201105	●
8	24	8	16	71	48	4	201207	●
10	28	8	25	85	56	4	201309	●
12	34	10	25	90	56	4	201400	●
12.5	41	16	25	100	56	6	201502	●
16	48	16	25	100	56	6	201604	●
20	56	16	32	112	60	6	201706	●

Form B – chwyt walcowy z płaską / flatted shank / Zylinderschaft mit Mitnahmefläche / хвостовик с лыской

R (H11)	D	D1 (js14)	d (h6)	L (js18)	l	z	HSS	
							Code No 0641-594-	
1	8	6	10	60	40	4	220100	○
1.25	8.5	6	10	60	40	4	220202	○
1.6	9.2	6	10	60	40	4	220304	○
2	10	6	10	60	40	4	220406	○
2.5	11	6	10	60	40	4	220508	○
3	12	6	12	60	45	4	220600	○
3.15	12.3	6	12	60	45	4	220701	○
4	14	6	12	60	45	4	220803	○
5	16	6	12	60	45	4	220905	○
6	20	8	16	67	48	4	221000	○
6.3	20.6	8	16	71	48	4	221101	○
8	24	8	16	71	48	4	221203	○
10	28	8	25	85	56	4	221305	○
12	34	10	25	90	56	4	221407	○
12.5	41	16	25	100	56	6	221509	○
16	48	16	25	100	56	6	221600	○
20	56	16	32	112	60	6	221702	○