

DIN 850 C



H

Frezy trzpieniowe do rowków Woodruffa, ostrza proste

Woodruff keysat cutters, plain teeth

Schlitzfräser für Scheibenfedernnuten, gradeverzahnt

Фрезы для шпонок типа Woodruff с прямыми зубьями

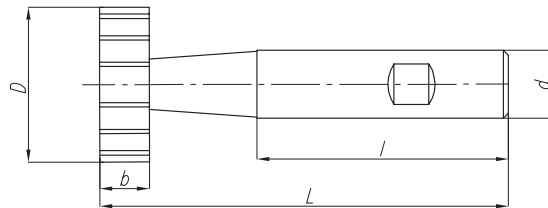

Form C – chwyt walcowy z płaską / flatted shank / Zylinderschaft mit Mitnahmefläche / хвостовик с лыской

D (h12)	d (h6)	L	l	b	z	HSS	
						Code No 0641-599-	
4.5	6	50	36	1	8	285101	○
7.5	6	50	36	1.5	8	285203	○
7.5	6	50	36	2	8	285305	○
10.5	6	50	36	2	10	285407	○
10.5	6	50	36	2.5	10	285509	○
10.5	6	50	36	3	10	285600	○
13.5	10	56	40	2	10	285702	○
13.5	10	56	40	3	10	285804	○
13.5	10	56	40	4	10	285900	○
16.5	10	56	40	3	10	286000	○
16.5	10	56	40	4	10	286102	○
16.5	10	56	40	5	10	286204	○
19.5	10	63	40	3	12	286306	○
19.5	10	63	40	4	12	286408	○
19.5	10	63	40	5	12	286500	○
19.5	10	63	40	6	12	286601	○
22.5	10	63	40	4	12	286703	○
22.5	10	63	40	5	12	286805	○
22.5	10	63	40	6	12	286907	○
22.5	10	63	40	8	12	287001	○
25.5	10	63	40	5	14	287103	○
25.5	10	63	40	6	14	287205	○
28.5	10	63	40	6	16	287307	○
28.5	10	63	40	8	16	287409	○
28.5	12	71	45	10	16	287500	○
32.5	12	71	45	6	18	287602	○
32.5	12	71	45	7	18	287704	○
32.5	12	71	45	8	18	287806	○
32.5	12	71	45	10	18	287908	○
38.5	12	71	45	8	20	288002	○
45.5	12	71	45	8	22	288104	○
45.5	12	71	45	10	22	288206	○