

DIN 327 DK


Frezy trzpieniowe, 2-ostrowe, z chwytem wlacowym z płaską, do rowków na wpusty

Slot drills, 2-flute, with flattened shank

Langlochfräser, 2-Schneiden, Zylinderschaft mit Mitnahmevläche

Фрезы концевые шпоночные, 2-х перьевые, хвостовик с лыской

B

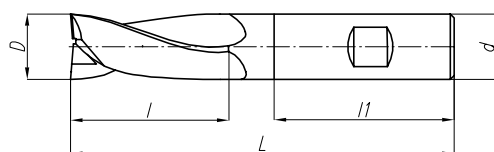

DIN
327 DK

Z=2

DIN
1835 B

$\lambda=30^\circ$
 $\gamma=10^\circ$

D (e8)	d (h8)	L	l	l1	z	HSS		HSS-E	
						Code No 0641-554-		Code No 0641-554-	
2	6	48	4	36	2	025000	●	145104	●
2.5	6	49	5	36	2	025037	○	145206	●
3	6	49	5	36	2	025057	●	145308	●
4	6	51	7	36	2	025102	●	145501	●
5	6	52	8	36	2	025204	●	145705	●
6	6	52	8	36	2	025306	●	145909	●
7	10	60	10	40	2	025408	○	146105	●
8	10	61	11	40	2	025500	●	146309	●
10	10	63	13	40	2	025703	●	146706	●
12	12	73	16	45	2	025907	○	147106	●
14	12	73	16	45	2	026103	●	147300	●
16	16	79	19	48	2	026307	●	147503	●
18	16	79	19	48	2	026500	○	147605	●
20	20	88	22	50	2	026704	●	147707	●
22	20	88	22	50	2	026908	○	147809	○
24	25	102	26	56	2	027104	○	148005	○
25	25	102	26	56	2	027206	●	148107	○
28	25	102	26	56	2	027501	○	148300	○
32	32	112	32	60	2	027705	○	148504	○
36	32	112	32	60	2	028105	○	148606	○
40	40	130	38	70	2	028309	○	148708	○
45	40	130	38	70	2	028400	○	148800	○
50	50	147	45	80	2	028502	○	148901	○
56	50	147	45	80	2	028604	○	149006	○
63	50	155	53	80	2	028706	○	149108	○