

DIN 1889/3 FBKH


B

Frezy trzpieniowe zbieżne, z czołem kulistym, 4-ostrzowe, z chwytem walcowym z płaską, krótkie

End mills tapered, ball nosed, 4-flute, flatted shank, standard series

Gesenkräuser mit runder Stirn, 4-Schneiden, Zentrumschnitt, Zylinderschaft mit Mitnahmefläsche, kurz

Фрезы концевые конические, со сферическим торцом, 4-х перьевые, хвостовик с лыской, стандартные

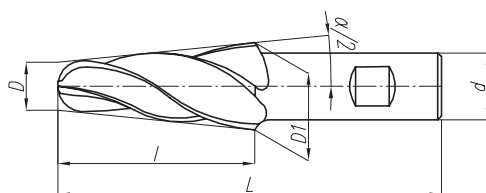

pochylenie convergence Konvergenz сходимость	D (k12)	D1	d (h6)	L	l	z	$\alpha/2$	HSS		HSS-E	
								Code No 0641-559-		Code No 0641-559-	
1:6	2.5	13	12	85	31.5	4	9°28'	320105	○	325106	○
1:6	4	16	16	93	36	4	9°28'	320207	○	325208	○
1:6	6	20	20	106	42	4	9°28'	320309	○	325300	○
1:6	8	25	25	120	50	4	9°28'	320400	○	325401	○
1:6	12	33	32	135	63	4	9°28'	320502	○	325503	○
1:10	2.5	10	10	85	37.5	4	5°43'	320604	○	325605	○
1:10	4	12	10	90	40	4	5°43'	320706	○	325707	○
1:10	6	14	12	95	40	4	5°43'	320808	○	325809	○
1:10	8	17	16	103	45	4	5°43'	320900	○	325900	○
1:10	12	21	20	106	45	4	5°43'	321004	○	326005	○
1:10	16	26	25	120	50	4	5°43'	321106	○	326107	○
1:20	4	8	8	90	40	4	2°52'	321208	○	326209	○
1:20	6	10	10	95	40	4	2°52'	321300	○	326300	○
1:20	8	12.5	12	105	45	4	2°52'	321401	○	326402	○
1:20	12	17	16	109	50	4	2°52'	321503	○	326504	○
1:20	16	21.6	20	120	56	4	2°52'	321605	○	326606	○
1:20	20	26.3	25	135	63	4	2°52'	321707	○	326708	○