


DIN 844 BLM NR

Frezy trzpieniowe walcowo-czołowe z łamaczem wióra, z ostrzami centralnymi, wieloostrzowe, z chwytem walcowym z płaską, długie

End mills roughing, centre cutting, multiflute, with flatted shank, long series

Schruppfräser, 4-8 Schneiden, Zentrumschnitt, Zylinderschaft mit Mitnahmefläsche, lang

Фрезы концевые с стружколомателем, с центральным зубом, многоперьевые, хвостовик с лыской, удлинённые

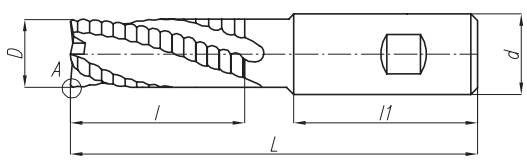

**DIN
844 BLM
NR**

Z=4÷8

$\lambda=30^\circ$
 $\gamma=10^\circ$

D (js14)	d (h6)	L	l	l1	z	HSS-E	
						NR	
						Code No 0641-551-	
6	6	68	24	36	4	238009	○
7	10	80	30	40	4	238100	○
8	10	88	38	40	4	238202	○
9	10	88	38	40	4	238304	○
10	10	95	45	40	4	238406	○
12	12	110	53	45	4	238508	○
14	12	110	53	45	4	238523	○
15	12	110	53	45	4	238535	○
16	16	123	63	48	4	238600	○
18	16	123	63	48	4	238701	○
20	20	141	75	50	4	238803	○
22	20	141	75	50	4	238905	○
23	20	141	75	50	4	239000	○
24	25	166	90	56	4	239102	○
25	25	166	90	56	4	239204	○
26	25	166	90	56	6	239306	○
28	25	166	90	56	6	239408	○
30	25	166	90	56	6	239510	○
32	32	186	106	60	6	239612	○
35	32	186	106	60	6	239714	○
36	32	186	106	60	6	239816	○
40	40	217	125	70	6	239918	○
44	40	217	125	70	6	240001	○
45	40	217	125	70	6	240103	○
50	50	252	150	80	8	240205	○
56	50	252	150	80	8	240307	○
63	50	282	180	80	8	240409	○