

DIN 327 BK



B

Frezy trzpieniowe, 2-ostrowe, z chwytem walcowym, do rowków na wpusty

Slot drills, 2-flute, with plain shank

Langlochfräser, 2-Schneiden, Zylinderschaft

Фрезы концевые шпоночные, 2-х перьевые, с цилиндрическим хвостовиком

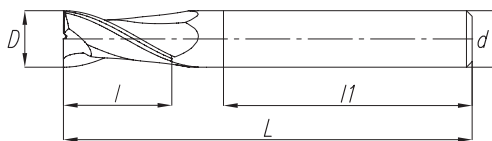

D (e8)	d (h8)	L	l	l1	z	HSS-E	
						Code No 0641-554-	
2	6	48	4	36	2	100005	●
2.5	6	49	5	36	2	100018	●
3	6	49	5	36	2	100031	●
4	6	51	7	36	2	100107	●
4.5	6	51	7	36	2	100209	●
5	6	52	8	36	2	100300	●
6	6	52	8	36	2	100504	●
6.5	10	60	10	40	2	100606	●
7	10	60	10	40	2	100708	●
8	10	61	11	40	2	100901	●
9	10	61	11	40	2	101000	●
10	10	63	13	40	2	101200	●
11	12	70	13	45	2	101304	●
12	12	73	16	45	2	101505	●
13	12	73	16	45	2	101607	●
14	12	73	16	45	2	101709	●
16	16	79	19	48	2	101800	●
18	16	79	19	48	2	101902	●
20	20	88	22	50	2	102000	●
22	20	88	22	50	2	102102	●
23	20	88	22	50	2	102204	○
24	25	102	26	56	2	102306	●
25	25	102	26	56	2	102408	●
28	25	102	26	56	2	102500	●
32	32	112	32	60	2	102601	○
36	32	112	32	60	2	102703	○
40	40	130	38	70	2	102805	○
45	40	130	38	70	2	102907	○
50	50	147	45	80	2	103001	○
56	50	147	45	80	2	103103	○
63	50	155	53	80	2	103205	○